


Cartridge

300 Rem SA Ultra Mag - 125 grain

Version 9.0

NOSLER®

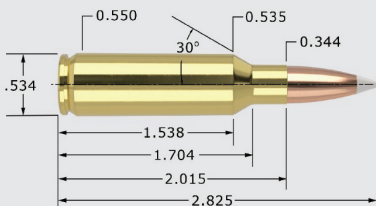

300 Rem SA Ultra Mag - 125 grain 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 125gr. Spitzer	2.825"	0.366	0.188
Ballistic Tip®	BT 125gr. Spitzer	2.825"	0.366	0.188

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	69.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	68.0 MAX. 3341		** 105%
	66.0 3227		** 102%
	64.0 * 3113		99%
W760	69.0 MAX. 3452		** 104%
	67.0 * 3387		** 101%
	65.0 3323		98%
AA 2495 Most Accurate Powder Tested	63.0 MAX. 3505		** 103%
	61.0 * 3385		100%
	59.0 3266		97%
RL15	63.0 MAX. 3518		95%
	61.0 3390		92%
	59.0 * 3262		89%
H4895	61.0 MAX. 3529		97%
	59.0 3402		93%
	57.0 * 3275		90%
Varget	64.0 MAX. 3530		100%
	62.0 * 3414		97%
	60.0 3298		93%
IMR 4064	61.5 MAX. 3543		98%
	59.5 3420		95%
	57.5 * 3298		92%
N540	66.0 MAX. 3609		** 106%
	64.0 * 3486		** 102%
	62.0 3363		99%
AA 2700	74.0 MAX. 3619		** 111%
	72.0 3548		** 108%
	70.0 * 3476		** 105%
N550	70.0 MAX. 3632		** 112%
	68.0 * 3549		** 109%
	66.0 3466		** 106%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load