


# Cartridge

## 300 Rem SA Ultra Mag - 150/155 grain

Version 9.0

# NOSLER®

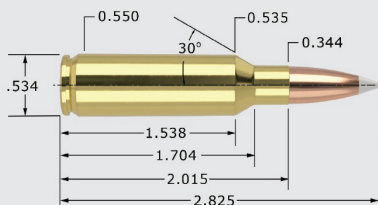

## 300 Rem SA Ultra Mag - 150/155 grain 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	2.825"	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	2.825"	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	2.825"	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	2.800"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	2.825"	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	2.825"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	67.5 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>RL15</b>	59.0 * MAX.	3192	91%	
		3064	88%	
		2937	85%	
<b>Varget</b>	60.0 MAX.	3206	96%	
	Most Accurate	58.0 *	3086	93%
	Powder Tested	56.0	2966	90%
<b>IMR 4350</b>	65.0 MAX.	3208	** 103%	
		3116	100%	
	61.0 *	3024	97%	
<b>W760</b>	65.0 MAX.	3218	** 101%	
	63.0 *	3100	98%	
		2982	95%	
<b>IMR 4831</b>	69.0 MAX.	3246	** 109%	
	67.0 *	3169	** 106%	
		3092	** 103%	
<b>H380</b>	65.5 MAX.	3259	** 102%	
		3156	99%	
	61.5 *	3054	96%	
<b>H4350</b>	66.5 MAX.	3264	** 104%	
	64.5 *	3180	** 101%	
		3097	98%	
<b>H414</b>	66.0 MAX.	3271	** 102%	
		3187	99%	
	62.0 *	3104	96%	
<b>N550</b>	63.5 MAX.	3277	** 105%	
		3163	** 101%	
	59.5 *	3049	98%	
<b>Big Game</b>	64.0 MAX.	3282	97%	
		3184	94%	
	60.0 *	3086	91%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load