


# Cartridge

## 300 Rem SA Ultra Mag - 175/180 grain

Version 9.0

# NOSLER®

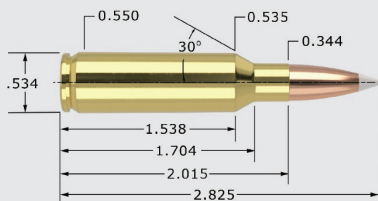

## 300 Rem SA Ultra Mag - 175/180

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b>	175gr. HPBT	2.825"	0.505	0.264
Reduced Drag Factor™	<b>RDF</b>	175gr. HPBT	2.825"	0.536	0.264
AccuBond®	<b>AB</b>	180gr. Spitzer	2.825"	0.507	0.271
Ballistic Tip®	<b>BT</b>	180gr. Spitzer	2.825"	0.507	0.271
CT® Ballistic Silvertip®	<b>BST</b>	180gr. Spitzer	2.825"	0.507	0.271
Expansion Tip®	<b>ET</b>	180gr. Spitzer	2.800"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	180gr. PPT	2.825"	0.361	0.271
Partition®	<b>PT</b>	180gr. Spitzer	2.745"	0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	64.3 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4451</b>	57.0 * MAX. 2828		94%
	55.0 2770		91%
	53.0 2712		88%
<b>IMR 4350</b> Most Accurate Powder Tested	60.5 MAX. 2944		** 101%
	58.5 2860		97%
	56.5 * 2775		94%
<b>IMR 7828</b>	66.5 MAX. 2948		** 110%
	64.5 2865		** 107%
	62.5 * 2783		** 103%
<b>H4350</b>	60.5 MAX. 2956		100%
	58.5 * 2864		96%
	56.5 2773		93%
<b>H414</b>	62.5 MAX. 2967		** 101%
	60.5 * 2875		98%
	58.5 2784		95%
<b>W760</b>	61.0 MAX. 2982		99%
	59.0 2893		96%
	57.0 * 2804		93%
<b>N550</b>	60.0 MAX. 2989		** 104%
	58.0 * 2893		100%
	56.0 2798		97%
<b>RL17</b>	60.0 MAX. 3007		97%
	58.0 * 2891		93%
	56.0 2774		90%
<b>IMR 4831</b>	65.5 MAX. 3016		** 109%
	63.5 2940		** 106%
	61.5 * 2864		** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load