


Cartridge

300 Rem SA Ultra Mag - 190 grain

Version 9.0

NOSLER®

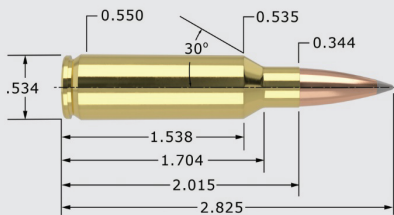

300 Rem SA Ultra Mag - 190 grain 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	190gr. Spitzer	2.825"	0.597	0.286
Custom Competition®	CC	190gr. HPBT	2.825"	0.530	0.286
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	65.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Hunter	64.0 MAX.	2873	** 102%		
	62.0 *	2800	98%		
	60.0	2727	95%		
H414	60.0 MAX.	2876	96%		
	58.0	2798	93%		
	56.0 *	2719	90%		
H4831 Most Accurate Powder Tested	66.0 MAX.	2876	** 106%		
	64.0 *	2812	** 103%		
	62.0	2748	99%		
Norma 204	60.5 MAX.	2891	** 103%		
	58.5	2783	100%		
	56.5 *	2676	97%		
Hybrid 100V	60.0 MAX.	2897	95%		
	58.0	2790	92%		
	56.0 *	2683	89%		
RL19	64.0 MAX.	2904	** 107%		
	62.0	2815	** 104%		
	60.0 *	2726	** 100%		
RL17	58.0 MAX.	2908	92%		
	56.0 *	2781	89%		
	54.0	2654	86%		
IMR 4350	60.5 MAX.	2910	100%		
	58.5	2819	96%		
	56.5 *	2728	93%		
N560	65.5 MAX.	2915	** 112%		
	63.5 *	2828	** 109%		
	61.5	2742	** 105%		
RL22	66.0 MAX.	2934	** 110%		
	64.0	2836	** 107%		
	62.0 *	2738	** 104%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load