


# Cartridge

## 300 Rem SA Ultra Mag - 200 grain

Version 9.0

# NOSLER®

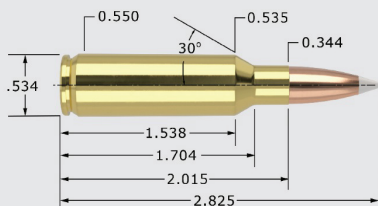

## 300 Rem SA Ultra Mag - 200 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 200gr. Spitzer	2.825"	0.588	0.301
Partition®	<b>PT</b> 200gr. Spitzer	2.825"	0.481	0.301

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	65.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N550</b>	57.5 MAX.	2770	98%
	55.5	2690	95%
	53.5 *	2610	91%
<b>W760</b>	60.0 MAX.	2774	97%
	58.0	2683	93%
	56.0 *	2593	90%
<b>H414</b>	61.0 MAX.	2792	98%
	59.0 *	2703	95%
	57.0	2614	91%
<b>IMR 4350</b>	60.5 MAX.	2792	100%
	58.5 *	2708	96%
	56.5	2625	93%
<b>Hunter</b>	62.0 MAX.	2792	98%
	60.0 *	2725	95%
	58.0	2658	92%
<b>H4350</b>	60.0 MAX.	2805	98%
	58.0	2718	94%
	56.0 *	2632	91%
<b>RL19</b>	63.0 MAX.	2808	** 105%
	61.0 *	2714	** 102%
	59.0	2620	99%
<b>N160</b>	62.5 * MAX.	2827	** 107%
	60.5	2740	** 103%
	58.5	2653	100%
<b>RL22</b>	67.0 MAX.	2869	** 112%
	65.0	2796	** 109%
	63.0 *	2723	** 105%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load