


# Cartridge

## 300 Rem SA Ultra Mag - 210 grain

Version 9.0

# NOSLER<sup>®</sup>

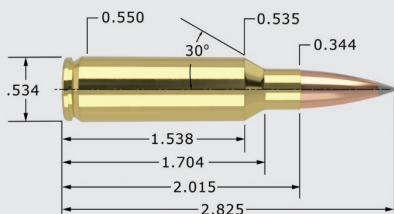

## 300 Rem SA Ultra Mag - 210 grain 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond <sup>®</sup> Long Range	<b>ABLR</b> 210gr. Spitzer	2.825"	0.661	0.316
Reduced Drag Factor <sup>™</sup>	<b>RDF</b> 210gr. HPBT	2.825"	0.707	0.316

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	64.1 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4831SC</b>	62.0 MAX. 2643		** 101%
	60.0 * 2586		98%
	58.0 2528		94%
<b>IMR 4350</b>	57.0 * MAX. 2688		95%
	55.0 2595		92%
	53.0 2502		88%
<b>RL17</b>	56.0 MAX. 2716		90%
	54.0 * 2620		87%
	52.0 2524		84%
<b>H4350</b>	58.0 MAX. 2737		96%
	56.0 2670		92%
	54.0 * 2603		89%
<b>H414</b>	59.0 MAX. 2751		96%
	57.0 * 2656		93%
	55.0 2561		89%
<b>RL19</b>	63.0 MAX. 2755		** 107%
	Most Accurate Powder Tested 61.0 * 2670		** 103%
	59.0 2585		100%
<b>Norma MRP</b>	64.0 * MAX. 2770		** 110%
	62.0 2692		** 106%
	60.0 2614		** 103%
<b>RL22</b>	63.0 MAX. 2783		** 107%
	61.0 2702		** 103%
	59.0 * 2621		100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load