


# Cartridge

## 300 Savage - 125 grain

Version 9.0

# NOSLER®

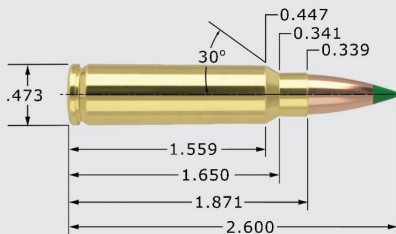

## 300 Savage - 125 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	125gr. Spitzer	2.600"	0.366	0.188
Ballistic Tip®	<b>BT</b>	125gr. Spitzer	2.600"	0.366	0.188
CASE TYPE:	Winchester	PRIMER TYPE	WLR		
CASE HOLDS:	47.2 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-12"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>BL-C(2)</b>	42.5 * MAX.	2660	91%		
	40.5	2530	87%		
	38.5	2400	83%		
<b>AA 2230</b>	41.0 * MAX.	2768	89%		
	39.0	2653	84%		
	37.0	2538	80%		
<b>H4198</b>	37.0 MAX.	2832	88%		
	35.0	2667	83%		
	33.0 *	2502	79%		
<b>Varget</b>	45.5 MAX.	2957	**	104%	
	43.5 *	2810	100%		
	41.5	2664	95%		
<b>W748</b>	46.5 MAX.	2978	**	103%	
	Most Accurate	44.5 *	2868	98%	
	Powder Tested	42.5	2758	94%	
<b>RL7</b>	40.0 * MAX.	3021	92%		
	38.0	2849	88%		
	36.0	2676	83%		
<b>AA 2015</b>	43.5 MAX.	3030	**	105%	
	41.5	2873	100%		
	39.5 *	2717	95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load