


Cartridge

300 Savage - 150/155 grain

Version 9.0

NOSLER®

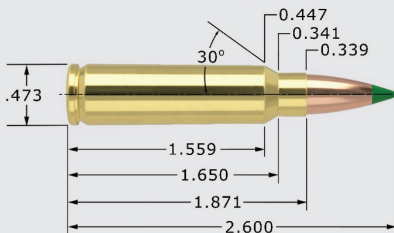

300 Savage - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	2.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	2.600"	0.435 0.226
Ballistic Tip®	BT	150gr. Spitzer	2.600"	0.435 0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	2.600"	0.435 0.226
Expansion Tip®	ET	150gr. Spitzer	2.580"	0.469 0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT	150gr. Spitzer	2.600"	0.387 0.226
Custom Competition®	CC	155gr. HPBT	2.600"	0.450 0.233

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	44.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	37.0 MAX.	2534	95%
		2387	90%
	33.0 *	2239	84%
IMR 4064	40.0 * MAX.	2560	100%
		2460	95%
		2360	90%
IMR 4895	40.0 MAX.	2580	98%
	Most Accurate	2450	93%
	Powder Tested	36.0 * 2320	88%
IMR 3031	38.0 MAX.	2590	95%
		2450	90%
	34.0 *	2310	85%
N140	44.0 MAX.	2601	** 115%
		2486	** 110%
	40.0 *	2371	** 105%
Varget	42.0 MAX.	2662	** 102%
		2546	97%
	38.0 *	2430	93%
W748	42.0 MAX.	2682	99%
		2506	94%
	38.0 *	2330	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load