


# Cartridge

## 300 Savage - 175/180 grain

Version 9.0

# NOSLER®

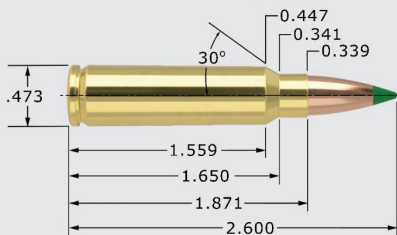

## 300 Savage - 175/180 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.600"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b>	175gr. HPBT	2.600"	0.505	0.264
Reduced Drag Factor™	<b>RDF</b>	175gr. HPBT	2.600"	0.536	0.264
AccuBond®	<b>AB</b>	180gr. Spitzer	2.600"	0.507	0.271
Ballistic Tip®	<b>BT</b>	180gr. Spitzer	2.600"	0.507	0.271
CT® Ballistic Silvertip®	<b>BST</b>	180gr. Spitzer	2.600"	0.507	0.271
Expansion Tip®	<b>ET</b>	180gr. Spitzer	2.580"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	180gr. PPT	2.520"	0.361	0.271
Partition®	<b>PT</b>	180gr. Spitzer	2.600"	0.474	0.271

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	39.7 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>AA 2460</b>	36.0	MAX.	2298	92%
	34.0		2203	87%
	32.0	*	2108	81%
<b>Varget</b>	36.5	MAX.	2343	99%
	34.5	*	2284	94%
	32.5		2224	89%
<b>IMR 4895</b>	38.5	* MAX.	2350	** 106%
	36.5		2200	100%
	34.5		2050	95%
<b>N135</b>	36.5	MAX.	2351	** 107%
	34.5		2237	** 101%
	32.5	*	2124	95%
<b>IMR 3031</b>	36.0	* MAX.	2360	** 101%
	34.0		2230	95%
	32.0		2100	90%
<b>IMR 4064</b>	38.0	* MAX.	2368	** 106%
	36.0		2263	** 100%
	34.0		2158	95%
<b>AA 2015</b>	37.5	MAX.	2502	** 107%
	35.5		2374	** 102%
	33.5	*	2247	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load