


Cartridge

300 WSM - 125 grain

Version 9.0

NOSLER®

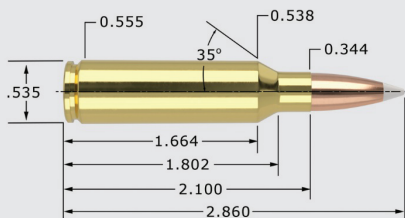

300 WSM - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	2.835"	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	2.835"	0.366	0.188
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	76.0 Gr. WATER	BARREL Length/Make	26" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL19	75.0 MAX.	3522		**	107%
	73.0 *	3430		**	104%
	71.0	3338		**	102%
Varget	66.0 MAX.	3545			94%
	64.0	3453			91%
	62.0 *	3361			88%
RL15	66.0 MAX.	3580			90%
	64.0 *	3465			88%
	62.0	3350			85%
IMR 4350	72.0 * MAX.	3580		**	101%
	70.0	3486			99%
	68.0	3392			96%
IMR 4064	64.5 * MAX.	3600			94%
	62.5	3473			91%
	60.5	3346			88%
H380	72.0 MAX.	3600			100%
	70.0 *	3538			97%
	68.0	3476			94%
AA 2520	65.5 MAX.	3612			89%
	63.5	3547			86%
	61.5 *	3482			83%
H414	72.5 MAX.	3636			99%
	70.5	3546			97%
	68.5 *	3456			94%
N550	70.0 MAX.	3642		**	102%
	Most Accurate	68.0	3516		99%
	Powder Tested	66.0 *	3391		96%
W760	73.0 MAX.	3661		**	101%
	71.0	3565			98%
	69.0 *	3469			95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load