


Cartridge

300 WSM - 150/155 grain

Version 9.0

NOSLER®

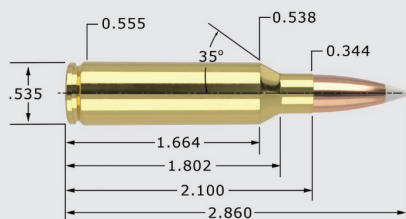

300 WSM - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	2.830"	0.435	0.226
Ballistic Tip®	BT	150gr. Spitzer	2.830"	0.435	0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	2.830"	0.435	0.226
Expansion Tip®	ET	150gr. Spitzer	2.800"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	2.815"	0.387	0.226
Custom Competition®	CC	155gr. HPBT	2.830"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	75.1 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	60.5 MAX. 3186		87%
	58.5 3107		84%
	56.5 * 3029		81%
RL15	61.5 MAX. 3220		85%
	59.5 * 3140		83%
	57.5 3060		80%
RL19	69.5 MAX. 3241		** 101%
	67.5 * 3127		98%
	65.5 3014		95%
IMR 4064 Most Accurate Powder Tested	60.5 MAX. 3243		89%
	58.5 * 3153		86%
	56.5 3064		83%
IMR 4350	67.5 MAX. 3270		96%
	65.5 3160		93%
	63.5 * 3050		90%
H414	67.0 MAX. 3280		93%
	65.0 3186		90%
	63.0 * 3092		87%
IMR 4831	69.0 * MAX. 3293		98%
	67.0 3182		95%
	65.0 3071		93%
W760	67.5 MAX. 3293		94%
	65.5 * 3213		91%
	63.5 3133		89%
N550	65.5 MAX. 3315		97%
	63.5 * 3194		94%
	61.5 3073		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load