


# Cartridge

300 WSM - 190 grain

Version 9.0

# NOSLER®

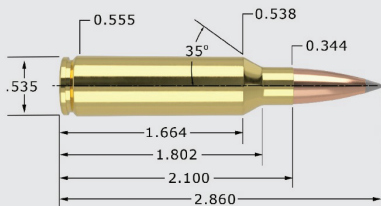

300 WSM - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	190gr. Spitzer	2.860"	0.597	0.286
Custom Competition®	<b>CC</b>	190gr. HPBT	2.840"	0.530	0.286
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	70.5	Gr. WATER	BARREL Length/Make	24" H-S Prec.	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>H4831SC</b>	69.0 MAX. 2893			**	102%
Most Accurate Powder Tested	67.0 * 2822				99%
	65.0 2751				96%
<b>Norma 204</b>	62.0 * MAX. 2919				98%
	60.0 2837				95%
	58.0 2755				91%
<b>Hunter</b>	65.0 MAX. 2921				95%
	63.0 * 2810				92%
	61.0 2699				89%
<b>IMR 7828 SSC</b>	70.0 MAX. 2924			**	102%
	68.0 * 2845				99%
	66.0 2766				97%
<b>N560</b>	69.0 MAX. 2942			**	109%
	67.0 2845			**	106%
	65.0 * 2748			**	102%
<b>RL17</b>	60.0 MAX. 2958				88%
	58.0 * 2860				85%
	56.0 2762				82%
<b>MAGPRO</b>	75.0 MAX. 2962			**	110%
	73.0 * 2880			**	107%
	71.0 2797			**	104%
<b>PP 4000-MR</b>	65.0 * MAX. 2967				97%
	63.0 2913				94%
	61.0 2859				91%
<b>Hybrid 100V</b>	63.5 MAX. 2968				93%
	61.5 2875				90%
	59.5 * 2781				87%
<b>Norma MRP</b>	68.0 MAX. 3016			**	106%
	66.0 * 2940			**	103%
	64.0 2864				100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load