


# Cartridge

300 WSM - 200 grain

Version 9.0

# NOSLER®

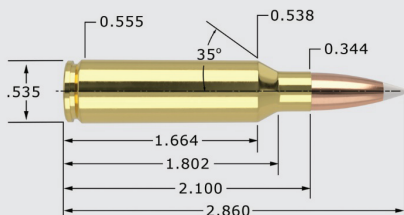

300 WSM - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	200gr. Spitzer	2.830"	0.588	0.301
Partition®	<b>PT</b>	200gr. Spitzer	2.815"	0.481	0.301
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	68.5 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>N550</b>	60.0 * MAX.	2842	97%		
	58.0	2762	94%		
	56.0	2682	91%		
<b>H414</b>	62.5 MAX.	2852	95%		
	60.5 *	2775	92%		
	58.5	2697	89%		
<b>W760</b>	62.5 MAX.	2854	96%		
	60.5 *	2768	92%		
	58.5	2681	89%		
<b>IMR 4350</b>	62.5 MAX.	2869	98%		
	60.5 *	2777	94%		
	58.5	2684	91%		
<b>IMR 4831</b>	64.5 MAX.	2884	**	101%	
	62.5	2804	98%		
	60.5 *	2723	94%		
<b>H4831SC</b>	68.0 MAX.	2893	**	103%	
	66.0 *	2813	**	100%	
	64.0	2733	97%		
<b>IMR 7828</b>	68.0 * MAX.	2898	**	106%	
	Most Accurate	2820	**	103%	
	Powder Tested	2742	99%		
<b>RL19</b>	66.0 MAX.	2909	**	105%	
	64.0	2828	**	102%	
	62.0 *	2748	98%		
<b>RL22</b>	67.0 MAX.	2942	**	106%	
	65.0 *	2875	**	103%	
	63.0	2808	100%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load