


Cartridge

300 WSM - 210 grain

Version 9.0

NOSLER®

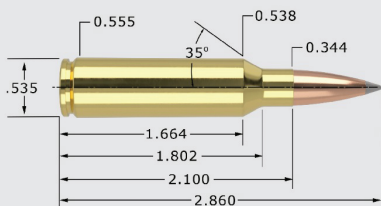

300 WSM - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	210gr. Spitzer	2.860"	0.661	0.316
Reduced Drag Factor™	RDF	210gr. HPBT	2.860"	0.707	0.316
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	66.1	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831	65.0 * MAX. 2792		**	102%	
	63.0 2715			99%	
	61.0 2638			96%	
IMR 4350	61.0 MAX. 2821			99%	
	59.0 * 2722			95%	
	57.0 2623			92%	
RL19	65.0 MAX. 2821		**	107%	
	63.0 * 2734		**	104%	
	61.0 2648			100%	
Hunter	65.0 MAX. 2825		**	101%	
	63.0 * 2722			98%	
	61.0 2619			95%	
H414	62.0 MAX. 2825			98%	
Most Accurate Powder Tested	60.0 2723			95%	
	58.0 * 2620			91%	
Norma MRP	66.0 * MAX. 2832		**	110%	
	64.0 2756		**	106%	
	62.0 2680		**	103%	
Hybrid 100V	61.0 MAX. 2845			95%	
	59.0 * 2767			92%	
	57.0 2689			89%	
N560	66.0 * MAX. 2852		**	111%	
	64.0 2772		**	108%	
	62.0 2692		**	104%	
RL22	66.0 MAX. 2865		**	109%	
	64.0 * 2795		**	105%	
	62.0 2725		**	102%	
PP 4000-MR	65.0 * MAX. 2891		**	104%	
	63.0 2813		**	100%	
	61.0 2735			97%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load