


Cartridge

300 WSM - 220 grain

Version 9.0

NOSLER®

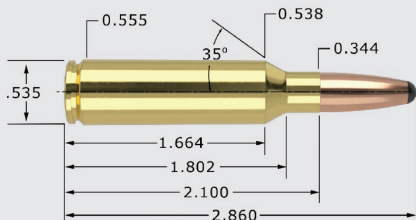

300 WSM - 220 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	220gr. HPBT	2.850"	0.690	0.331
Partition®	PT	220gr. Semi-Spitzer	2.815"	0.351	0.331
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	68.7	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N550	57.0 * MAX.	2667	92%		
	55.0	2592	89%		
	53.0	2517	86%		
W760	60.0 MAX.	2674	91%		
	58.0 *	2608	88%		
	56.0	2543	85%		
IMR 4350	60.0 MAX.	2677	93%		
	58.0 *	2598	90%		
	56.0	2519	87%		
H414	60.5 MAX.	2679	92%		
	58.5 *	2612	89%		
	56.5	2545	86%		
IMR 4831 Most Accurate Powder Tested	62.0 MAX.	2716	97%		
	60.0	2638	93%		
	58.0 *	2561	90%		
H4831SC	65.0 MAX.	2725	99%		
	63.0 *	2672	96%		
	61.0	2619	92%		
RL19	63.5 MAX.	2738	100%		
	61.5	2663	97%		
	59.5 *	2588	94%		
RL22	64.5 * MAX.	2753	** 102%		
	62.5	2688	99%		
	60.5	2624	96%		
IMR 7828	65.5 MAX.	2763	** 101%		
	63.5	2688	98%		
	61.5 *	2614	95%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load