


Cartridge

300 Wby Mag - 125 grain

Version 9.0

NOSLER®

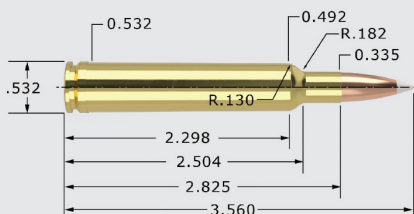

300 Wby Mag - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.560"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	3.530"	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	3.530"	0.366	0.188
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	96.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4350	80.5 * MAX.	3390	90%		
	78.5	3270	87%		
	76.5	3150	85%		
IMR 4831	82.0 * MAX.	3442	91%		
	80.0	3317	89%		
	78.0	3192	87%		
RL19	83.0 * MAX.	3462	94%		
	81.0	3347	92%		
	79.0	3232	89%		
H4350	81.5 * MAX.	3472	90%		
	79.5	3357	88%		
	77.5	3242	85%		
N165 Most Accurate Powder Tested	88.0 * MAX.	3541	** 102%		
	86.0	3462	100%		
	84.0	3384	97%		
N160	83.5 MAX.	3561	97%		
	81.5	3451	94%		
	79.5 *	3341	92%		
RL22	89.0 * MAX.	3682	** 101%		
	87.0	3577	99%		
	85.0	3472	96%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load