


Cartridge

300 Wby Mag - 150/155 grain

Version 9.0

NOSLER®

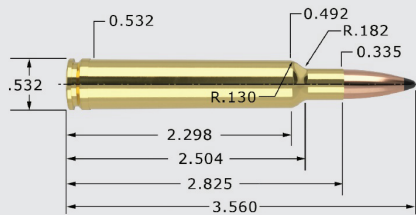

300 Wby Mag - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.560"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.550"	0.435	0.226
Ballistic Tip®	BT	150gr. Spitzer	3.550"	0.435	0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.550"	0.435	0.226
Expansion Tip®	ET	150gr. Spitzer	3.500"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.520"	0.386	0.226
Custom Competition®	CC	155gr. HPBT	3.540"	0.450	0.233

CASE TYPE:	Nosler		PRIMER TYPE	WLRM
CASE HOLDS:	92.2	Gr. WATER	BARREL Length/Make	26" Pac-Nor
			BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831	85.0 MAX. 3232	[Bar]	96%
Most Accurate	83.0 3127	[Bar]	94%
Powder Tested	81.0 * 3022	[Bar]	92%
Hybrid 100V	77.0 MAX. 3256	[Bar]	86%
	75.0 * 3195	[Bar]	84%
	73.0 3134	[Bar]	82%
RL19	81.0 MAX. 3327	[Bar]	95%
	79.0 3206	[Bar]	93%
	77.0 * 3085	[Bar]	91%
N160	81.0 MAX. 3333	[Bar]	98%
	79.0 3236	[Bar]	95%
	77.0 * 3139	[Bar]	93%
IMR 4831	81.0 MAX. 3352	[Bar]	94%
	79.0 3257	[Bar]	92%
	77.0 * 3162	[Bar]	89%
Norma MRP	86.0 MAX. 3383	[Bar]	** 103%
	84.0 * 3273	[Bar]	** 100%
	82.0 3162	[Bar]	98%
IMR 7828	89.0 * MAX. 3408	[Bar]	** 103%
	87.0 3313	[Bar]	** 100%
	85.0 3218	[Bar]	98%
IMR 4350	80.0 MAX. 3412	[Bar]	93%
	78.0 3277	[Bar]	90%
	76.0 * 3142	[Bar]	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load