


Cartridge

300 Wby Mag - 175/180 grain

Version 9.0

NOSLER®

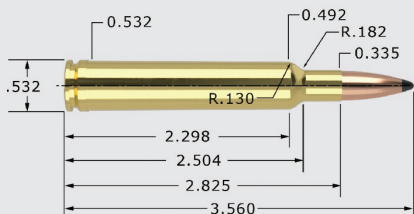

300 Wby Mag - 175/180 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.560"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	175gr. HPBT	3.550"	0.505	0.264
Reduced Drag Factor™	RDF	175gr. HPBT	3.550"	0.536	0.264
AccuBond®	AB	180gr. Spitzer	3.550"	0.507	0.271
Ballistic Tip®	BT	180gr. Spitzer	3.550"	0.507	0.271
CT® Ballistic Silvertip®	BST	180gr. Spitzer	3.550"	0.507	0.271
Expansion Tip®	ET	180gr. Spitzer	3.500"	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	180gr. PPT	3.420"	0.361	0.271
Partition®	PT	180gr. Spitzer	3.520"	0.474	0.271

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.8 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	74.5 MAX. 3024		87%
	72.5 * 2939		84%
	70.5 2855		82%
IMR 4831	77.0 MAX. 3056		90%
	75.0 3001		87%
	73.0 * 2946		85%
RL22	80.0 * MAX. 3132		95%
	78.0 3039		92%
	76.0 2945		90%
H1000	89.0 MAX. 3143		** 103%
	87.0 3076		** 100%
	85.0 * 3009		98%
RL25	86.5 MAX. 3150		** 102%
	84.5 * 3075		100%
	82.5 3000		98%
Hybrid 100V	78.0 MAX. 3168		88%
	76.0 * 3084		85%
	74.0 2999		83%
IMR 7828	84.5 * MAX. 3185		98%
	Most Accurate 82.5 3091		96%
	Powder Tested 80.5 2998		93%
RL19	79.0 MAX. 3196		94%
	77.0 * 3093		91%
	75.0 2990		89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load