


Cartridge

300 Wby Mag - 200 grain

Version 9.0

NOSLER®

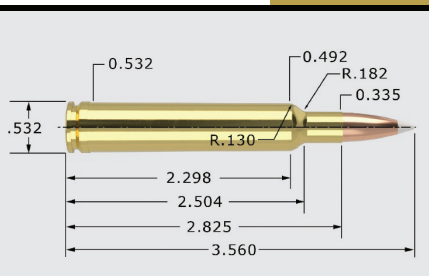

300 Wby Mag - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.560"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.550"	0.588	0.301
Partition®	PT	200gr. Spitzer	3.510"	0.481	0.301
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	87.6	Gr. WATER	BARREL Length/Make	26" Pac-Nor	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4831	72.0	MAX. 2818	88%		
	70.0	2763	85%		
	68.0 *	2708	83%		
N165	78.0	MAX. 2894	99%		
	76.0	2830	96%		
	74.0 *	2767	94%		
Hybrid 100V	74.0	MAX. 2929	87%		
	72.0	2862	85%		
	70.0 *	2794	82%		
Retumbo	86.0	MAX. 2929	**	106%	
	84.0	2868	**	103%	
	82.0 *	2806	**	101%	
IMR 4350	74.0	MAX. 2960	90%		
	72.0	2880	88%		
	70.0 *	2800	85%		
RL22 Most Accurate Powder Tested	78.0	MAX. 2982	97%		
	76.0	2897	94%		
	74.0 *	2812	92%		
RL25	85.0	MAX. 3000	**	105%	
	83.0	2932	**	103%	
	81.0 *	2863	**	101%	
IMR 7828	83.0	MAX. 3028	**	101%	
	81.0	2943	98%		
	79.0 *	2858	96%		
H1000	87.0	MAX. 3041	**	105%	
	85.0	2968	**	103%	
	83.0 *	2894	**	100%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load