


Cartridge

300 Wby Mag - 210 grain

Version 9.0

NOSLER®

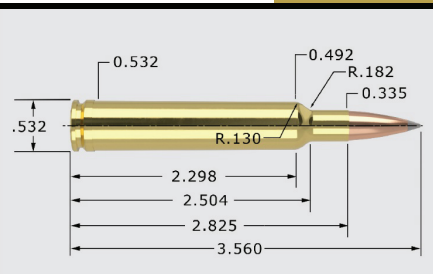

300 Wby Mag - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.560"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 210gr. Spitzer	3.560"	0.661	0.316
Reduced Drag Factor™	RDF 210gr. HPBT	3.560"	0.707	0.316

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	90.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
-------------	------------------	--------------------	-----------------------

IMR 4350 Most Accurate Powder Tested	72.0 * MAX.	2917		86%
	70.0	2839		83%
	68.0	2760		81%
RL22	76.5 * MAX.	2939		92%
	74.5	2839		90%
	72.5	2740		88%
Norma MRP	79.0 * MAX.	2940		96%
	77.0	2850		94%
	75.0	2760		92%
IMR 7828	79.0 * MAX.	2941		93%
	77.0	2825		91%
	75.0	2709		89%
RL19	78.0 * MAX.	2946		94%
	76.0	2855		92%
	74.0	2764		89%
H4831SC	78.0 MAX.	2954		90%
	76.0 *	2912		88%
	74.0	2870		86%
H1000	84.0 MAX.	2973		99%
	82.0 *	2933		96%
	80.0	2894		94%
RL25	83.0 * MAX.	2988	**	100%
	81.0	2902		98%
	79.0	2816		95%
Returnbo	86.0 * MAX.	3009	**	103%
	84.0	2915	**	100%
	82.0	2821		98%
Magnum	88.0 MAX.	3040		99%
	86.0	2961		97%
	84.0 *	2882		95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load