


# Cartridge

## 300 Win Mag - 125 grain

Version 9.0

# NOSLER®

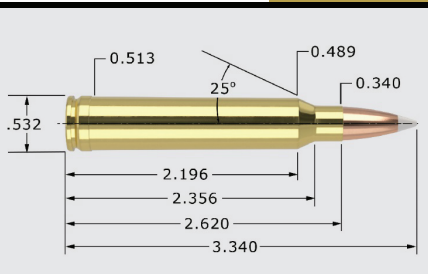

## 300 Win Mag - 125 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	125gr. Spitzer	3.340"	0.366	0.188
Ballistic Tip®	<b>BT</b>	125gr. Spitzer	3.340"	0.366	0.188
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	85.8 Gr. WATER	BARREL Length/Make	24" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4350</b> Most Accurate Powder Tested	75.0 * MAX.	3350	93%		
	73.0	3220	91%		
	71.0	3090	89%		
<b>N150</b>	67.5 MAX.	3377	93%		
	65.5	3309	90%		
	63.5 *	3241	87%		
<b>H380</b>	72.5 MAX.	3390	89%		
	70.5	3280	86%		
	68.5 *	3170	84%		
<b>N160</b>	77.5 MAX.	3406	100%		
	75.5	3312	98%		
	73.5 *	3217	95%		
<b>RL15</b>	68.0 * MAX.	3424	83%		
	66.0	3310	80%		
	64.0	3196	78%		
<b>IMR 4895</b>	67.5 MAX.	3468	86%		
	65.5	3363	83%		
	63.5 *	3258	81%		
<b>H414</b>	74.5 * MAX.	3469	90%		
	72.5	3343	88%		
	70.5	3218	86%		
<b>RL19</b>	81.0 MAX.	3500	**	103%	
	79.0	3405		100%	
	77.0 *	3309		98%	
<b>H4831SC</b>	84.0 * MAX.	3520	**	102%	
	82.0	3440		100%	
	80.0	3361		97%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
 \*\* = Compressed load