


Cartridge

300 Win Mag - 150/155 grain

Version 9.0

NOSLER®

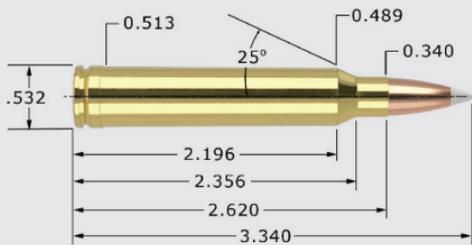

300 Win Mag - 150/155 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.340"	0.435	0.226
Ballistic Tip®	BT	150gr. Spitzer	3.340"	0.435	0.226
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.340"	0.435	0.226
Expansion Tip®	ET	150gr. Spitzer	3.310"	0.469	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.340"	0.387	0.226
Custom Competition®	CC	155gr. HPBT	3.340"	0.450	0.233

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	81.7 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	75.5 MAX. 3232		** 103%
	73.5 3142		100%
	71.5 * 3053		97%
H1000	84.0 * MAX. 3237		** 109%
	Most Accurate 82.0 3157		** 106%
	Powder Tested 80.0 3076		** 104%
H414	71.0 MAX. 3259		91%
	69.0 3191		88%
	67.0 * 3123		85%
IMR 4320	64.0 MAX. 3260		85%
	62.0 3190		82%
	60.0 * 3120		80%
N165	81.5 MAX. 3266		** 111%
	79.5 3191		** 108%
	77.5 * 3115		** 105%
RL19	76.5 * MAX. 3272		** 102%
	74.5 3157		99%
	72.5 3042		96%
H4831SC	81.0 MAX. 3314		** 103%
	79.0 3232		** 101%
	77.0 * 3151		98%
IMR 4831	76.0 * MAX. 3390		99%
	74.0 3320		97%
	72.0 3250		94%
IMR 4350	74.0 MAX. 3420		97%
	72.0 3330		94%
	70.0 * 3240		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load