


# Cartridge

## 300 Win Mag - 165/168 grain

Version 9.0

# NOSLER®

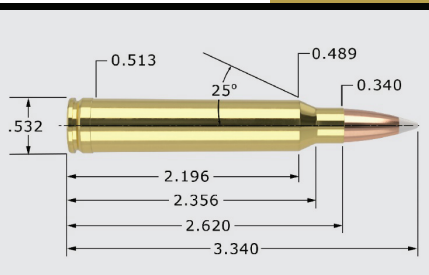

## 300 Win Mag - 165/168 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	165gr. Spitzer	3.340"	0.475	0.248
Ballistic Tip®	<b>BT</b>	165gr. Spitzer	3.340"	0.475	0.248
Partition®	<b>PT</b>	165gr. Spitzer	3.340"	0.410	0.248
AccuBond® Long Range	<b>ABLR</b>	168gr. Spitzer	3.340"	0.525	0.253
Ballistic Tip®	<b>BT</b>	168gr. Spitzer	3.340"	0.490	0.253
Bonded Solid Base®	<b>BSB</b>	168gr. PPT	3.340"	0.350	0.253
CT® Ballistic Silvertip®	<b>BST</b>	168gr. Spitzer	3.340"	0.490	0.253
Expansion Tip®	<b>ET</b>	168gr. Spitzer	3.310"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Reduced Drag Factor™	<b>RDF</b>	168gr. HPBT	3.340"	0.505	0.253

CASE TYPE:	Nosler		PRIMER TYPE	Fed 215	
CASE HOLDS:	81.1	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W760</b>	67.0 * MAX.	3022		87%
	65.0	2942		84%
	63.0	2862		81%
<b>N160</b>	72.5 MAX.	3091		99%
	70.5	3009		97%
	68.5 *	2926		94%
<b>IMR 4320</b>	62.0 MAX.	3118		83%
	60.0	3043		80%
	58.0 *	2968		78%
<b>H414</b>	69.0 MAX.	3145		89%
	67.0	3070		86%
	65.0 *	2995		83%
<b>H4350</b>	73.0 MAX.	3170		95%
	71.0	3070		93%
	69.0 *	2970		90%
<b>RL19</b> Most Accurate Powder Tested	75.0 MAX.	3192		** 101%
	73.0	3087		98%
	71.0 *	2982		95%
<b>IMR 7828</b>	80.0 MAX.	3213		** 105%
	78.0	3128		** 102%
	76.0 *	3043		100%
<b>IMR 4350</b>	72.0 MAX.	3260		95%
	70.0	3170		92%
	68.0 *	3080		90%
<b>IMR 4831</b>	74.0 MAX.	3260		98%
	72.0	3190		95%
	70.0 *	3120		92%
<b>RL22</b>	79.0 MAX.	3290		** 106%
	77.0	3200		** 103%
	75.0 *	3110		** 101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load