


Cartridge

300 Win Mag - 210 grain

Version 9.0

NOSLER®

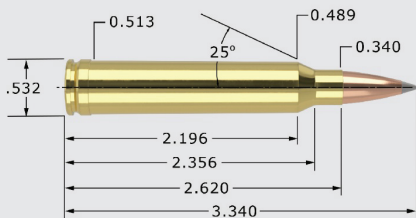

300 Win Mag - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	210gr. Spitzer	3.340"	0.661	0.316
Reduced Drag Factor™	RDF	210gr. HPBT	3.340"	0.707	0.316
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	78.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831SC	69.5 * MAX.	2731	93%		
Most Accurate Powder Tested	67.5	2659	90%		
	65.5	2587	87%		
Hunter	70.0 * MAX.	2740	92%		
	68.0	2718	90%		
	66.0	2695	87%		
PP 4000-MR	69.0 MAX.	2781	93%		
	67.0 *	2725	90%		
	65.0	2669	87%		
Norma MRP	71.0 * MAX.	2788	100%		
	69.0	2670	97%		
	67.0	2552	94%		
IMR 7828	73.0 * MAX.	2803	99%		
	71.0	2731	97%		
	69.0	2659	94%		
IMR 4350	67.5 * MAX.	2805	92%		
	65.5	2746	90%		
	63.5	2687	87%		
IMR 7977	78.0 MAX.	2831	**	107%	
	76.0 *	2761	**	105%	
	74.0	2691	**	102%	
RL22	71.5 MAX.	2838	99%		
	69.5	2755	97%		
	67.5 *	2671	94%		
RL26	76.0 * MAX.	2874	99%		
	74.0	2792	97%		
	72.0	2710	94%		
H1000	79.0 MAX.	2887	**	107%	
	77.0 *	2815	**	104%	
	75.0	2743	**	101%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested
 ** = Compressed load