


# Cartridge

## 308 Norma Mag - 150/155 grain

Version 9.0

# NOSLER®

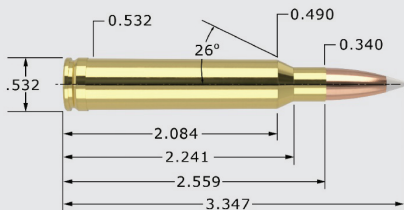

## 308 Norma Mag - 150/155 grain

## 30 Cal. (.308")

MAXIMUM O.A.C.L.		3.347"	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	<b>PT</b>	150gr. Spitzer	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	0.450	0.233

CASE TYPE:	Norma	PRIMER TYPE	Fed 215
CASE HOLDS:	81.0 Gr. WATER	BARREL Length/Make	24' Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H414</b>	69.0 MAX.	3040	89%
	67.0	2950	86%
	65.0 *	2860	84%
<b>N150</b>	62.0 MAX.	3118	90%
	60.0	3052	87%
	58.0 *	2986	84%
<b>IMR 4895</b>	60.0 MAX.	3170	81%
	58.0	3020	78%
	56.0 *	2870	75%
<b>RL15</b>	63.0 * MAX.	3206	81%
	61.0	3127	78%
	59.0	3048	76%
<b>IMR 4831</b>	74.0 * MAX.	3208	98%
	72.0	3103	95%
	70.0	2998	92%
<b>IMR 4064</b>	62.0 MAX.	3210	85%
	60.0	3090	82%
	58.0 *	2970	79%
<b>IMR 4350</b>	72.0 * MAX.	3232	95%
Most Accurate	70.0	3107	92%
Powder Tested	68.0	2982	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load