


Cartridge

308 Norma Mag - 165/168 grain

Version 9.0

NOSLER®

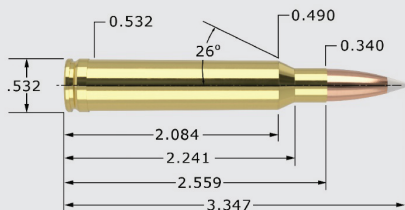

308 Norma Mag - 165/168 grain

30 Cal. (.308")

MAXIMUM O.A.C.L.		3.347"	B.C.	S.D.
AccuBond®	AB	165gr. Spitzer	0.475	0.248
Ballistic Tip®	BT	165gr. Spitzer	0.475	0.248
Partition®	PT	165gr. Spitzer	0.410	0.248
AccuBond® Long Range	ABLR	168gr. Spitzer	0.525	0.253
Ballistic Tip®	BT	168gr. Spitzer	0.490	0.253
Bonded Solid Base®	BSB	168gr. PPT	0.350	0.253
CT® Ballistic Silvertip®	BST	168gr. Spitzer	0.490	0.253
Custom Competition®	CC	168gr. HPBT	0.462	0.253
Expansion Tip®	ET	168gr. Spitzer	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Reduced Drag Factor™	RDF	168gr. HPBT	0.505	0.253

CASE TYPE:	Norma	PRIMER TYPE	Fed 215
CASE HOLDS:	73.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	60.0 * MAX.	2920	89%
	58.0	2870	86%
	56.0	2820	83%
H4831	73.5 * MAX.	3042	** 105%
	Most Accurate	2947	** 102%
	Powder Tested	2852	99%
IMR 4831	72.0 * MAX.	3080	** 105%
	70.0	3000	** 103%
	68.0	2920	100%
IMR 4064	61.0 MAX.	3082	92%
	59.0	2987	89%
	57.0 *	2892	86%
IMR 4350	70.0 * MAX.	3088	** 103%
	68.0	2963	100%
	66.0	2838	97%
N160	70.0 * MAX.	3089	** 107%
	68.0	3008	** 104%
	66.0	2928	** 100%
RL19	72.0 MAX.	3153	** 107%
	70.0	3056	** 104%
	68.0 *	2960	** 101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load