


# Cartridge

## 308 Norma Mag - 175/180 grain

Version 9.0

# NOSLER®

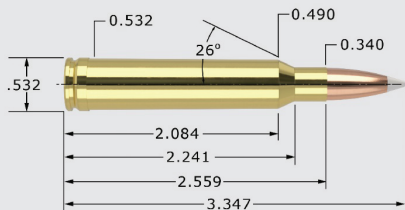

## 308 Norma Mag - 175/180 grain

## 30 Cal. (.308")

MAXIMUM O.A.C.L.		3.347"	B.C.	S.D.
Custom Competition®	<b>CC</b>	175gr. HPBT	0.505	0.264
Reduced Drag Factor™	<b>RDF</b>	175gr. HPBT	0.536	0.264
AccuBond®	<b>AB</b>	180gr. Spitzer	0.507	0.271
Ballistic Tip®	<b>BT</b>	180gr. Spitzer	0.507	0.271
CT® Ballistic Silvertip®	<b>BST</b>	180gr. Spitzer	0.507	0.271
Expansion Tip®	<b>ET</b>	180gr. Spitzer	0.523	0.271
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	<b>PT</b>	180gr. PPT	0.361	0.271
Partition®	<b>PT</b>	180gr. Spitzer	0.474	0.271

CASE TYPE:	Norma	PRIMER TYPE	Fed 215
CASE HOLDS:	69.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 7828</b>	72.5 MAX.	2860		** 111%
Most Accurate	70.5	2770		** 108%
Powder Tested	68.5 *	2680		** 105%
<b>IMR 4350</b>	68.0 MAX.	2900		** 105%
	66.0	2820		** 102%
	64.0 *	2740		99%
<b>N160</b>	67.0 MAX.	2906		** 107%
	65.0	2830		** 104%
	63.0 *	2753		** 101%
<b>IMR 4895</b>	58.0 MAX.	2932		91%
	56.0	2787		88%
	54.0 *	2642		85%
<b>RL19</b>	69.0 * MAX.	2956		** 108%
	67.0	2865		** 105%
	65.0	2774		** 102%
<b>IMR 4831</b>	71.0 * MAX.	2980		** 109%
	69.0	2880		** 106%
	67.0	2780		** 103%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load