


# Cartridge

## 308 Win - 110 grain

Version 9.0

# NOSLER<sup>®</sup>

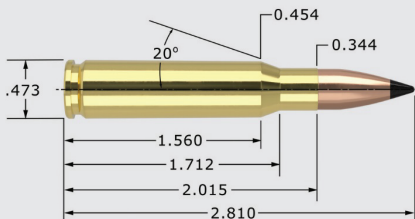

## 308 Win - 110 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.810"	TESTED O.A.C.L.	B.C.	S.D.	
Varmageddon <sup>®</sup>		VMG	110gr. FB Tipped	2.600"	0.293	0.166
CASE TYPE:	Nosler		PRIMER TYPE	WLR		
CASE HOLDS:	52.0	Gr. WATER	BARREL Length/Make	24" H-S Prec.		
			BARREL Twist	1-12"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>IMR 4895</b>	50.0	MAX. 3186	** 105%			
	48.0	3036	100%			
	46.0 *	2887	96%			
<b>AA 2015</b>	46.5 *	MAX. 3221	** 102%			
	44.5	3120	97%			
	42.5	3019	93%			
<b>RL7</b>	43.0 *	MAX. 3230	90%			
	41.0	3147	86%			
	39.0	3064	82%			
<b>H4895</b>	49.0 *	MAX. 3266	** 104%			
	47.0	3130	99%			
	45.0	2995	95%			
<b>H335</b>	50.0	MAX. 3323	98%			
	48.0	3184	94%			
	46.0 *	3045	90%			
<b>H322</b>	47.5 *	MAX. 3324	99%			
	45.5	3229	95%			
	43.5	3135	90%			
<b>IMR 4198</b>	42.0 *	MAX. 3326	94%			
	40.0	3206	89%			
	38.0	3086	85%			
<b>Benchmark</b>	49.0	MAX. 3365	** 102%			
Most Accurate	47.0 *	3277	98%			
Powder Tested	45.0	3189	94%			
<b>IMR 8208 XBR</b>	50.5 *	MAX. 3366	** 107%			
	48.5	3262	** 102%			
	46.5	3158	98%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load