


Cartridge

308 Win - 125 grain

Version 9.0

NOSLER®

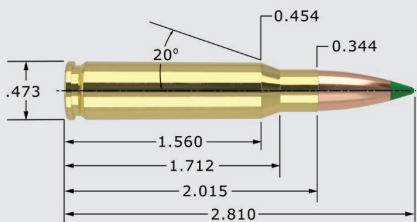

308 Win - 125 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.810"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	125gr. Spitzer	2.750"	0.366	0.188
Ballistic Tip®	BT	125gr. Spitzer	2.750"	0.366	0.188
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210M	
CASE HOLDS:	51.5	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H335	46.5 * MAX.	2990	92%		
	44.5	2870	88%		
	42.5	2750	84%		
IMR 4895	45.5 * MAX.	3010	96%		
	43.5	2840	92%		
	41.5	2670	88%		
IMR 4320	48.0 * MAX.	3048	**	101%	
	46.0	2883	97%		
	44.0	2718	93%		
RL7	41.5 * MAX.	3088	88%		
	39.5	2953	83%		
	37.5	2818	79%		
N135	46.5 * MAX.	3088	**	105%	
	44.5	2979	100%		
	42.5	2870	96%		
Varget	50.0 * MAX.	3143	**	105%	
	48.0	3010	**	101%	
	46.0	2878	97%		
AA 2460	48.0 MAX.	3150	94%		
	46.0	3040	90%		
	44.0 *	2930	86%		
N140	49.5 * MAX.	3155	**	112%	
	47.5	3045	**	107%	
	45.5	2934	**	103%	
W748	51.5 * MAX.	3214	**	104%	
	Most Accurate	49.5	3143	100%	
	Powder Tested	47.5	3073	96%	
TAC	50.0 MAX.	3284	99%		
	48.0 *	3173	95%		
	46.0	3061	91%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load