


# Cartridge

## 308 Win - 150/155 grain

Version 9.0

# NOSLER®

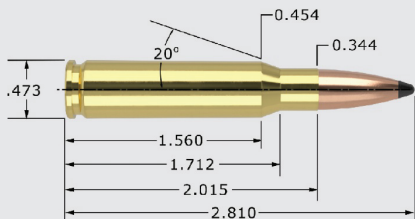

## 308 Win - 150/155 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.810"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	2.800"	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	2.800"	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	2.800"	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	2.750"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	2.770"	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	2.800"	0.450	0.226

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210M
CASE HOLDS:	49.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4895</b>	44.5 MAX.	2802	98%
	42.5	2673	93%
	40.5 *	2544	89%
<b>AR Comp</b>	44.0 MAX.	2829	** 101%
	42.0	2704	96%
	40.0 *	2579	92%
<b>IMR 4320</b>	47.0 * MAX.	2842	** 103%
	45.0	2727	99%
	43.0	2612	94%
<b>N135</b>	45.0 * MAX.	2863	** 106%
	43.0	2740	** 101%
	41.0	2617	96%
<b>IMR 3031</b>	45.0 MAX.	2880	** 101%
	43.0	2740	97%
	41.0 *	2600	92%
<b>N140</b>	46.5 MAX.	2887	** 109%
	Most Accurate	2766	** 105%
	Powder Tested	42.5 * 2645	100%
<b>Varget</b>	46.5 MAX.	2892	** 102%
	44.5 *	2777	97%
	42.5	2661	93%
<b>IMR 4064</b>	48.0 MAX.	2920	** 107%
	46.0	2830	** 103%
	44.0 *	2740	98%
<b>RL15</b>	46.0 MAX.	2958	97%
	44.0	2843	93%
	42.0 *	2728	88%
<b>TAC</b>	46.0 MAX.	2996	94%
	44.0	2883	90%
	42.0 *	2771	86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load