


# Cartridge

308 Win - 190 grain

Version 9.0

# NOSLER®

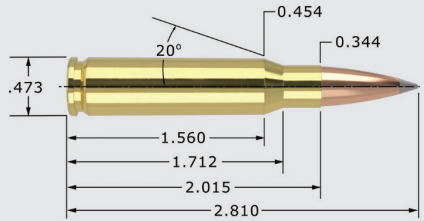

308 Win - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.			2.810"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	190gr. Spitzer	2.800"	0.597	0.286	
Custom Competition®	<b>CC</b>	190gr. HPBT	2.800"	0.530	0.286	
CASE TYPE:	Nosler		PRIMER TYPE	WLR		
CASE HOLDS:	47.0	Gr. WATER	BARREL Length/Make	24" H-S Prec.		
			BARREL Twist	1-12"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>H335</b>	40.0 MAX.	2433	86%			
	38.0	2328	82%			
	36.0 *	2223	78%			
<b>IMR 4166</b>	39.0 * MAX.	2446	88%			
	37.0	2305	84%			
	35.0	2164	79%			
<b>AR Comp</b> Most Accurate Powder Tested	40.0 MAX.	2490	97%			
	38.0	2372	92%			
	36.0 *	2255	87%			
<b>IMR 4064</b>	42.0 MAX.	2542	99%			
	40.0 *	2423	94%			
	38.0	2304	89%			
<b>AA 2520</b>	42.0 MAX.	2553	92%			
	40.0 *	2457	88%			
	38.0	2362	83%			
<b>Varget</b>	43.0 MAX.	2567	99%			
	41.0	2456	94%			
	39.0 *	2346	90%			
<b>IMR 4895</b>	42.5 MAX.	2567	98%			
	40.5 *	2468	94%			
	38.5	2370	89%			
<b>W760</b>	47.0 MAX.	2598	** 105%			
	45.0 *	2484	100%			
	43.0	2370	96%			
<b>PP 2000-MR</b>	46.5 MAX.	2627	100%			
	44.5	2515	96%			
	42.5 *	2403	91%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load