


# Cartridge

## 325 WSM - 180 grain

Version 9.0

# NOSLER<sup>®</sup>

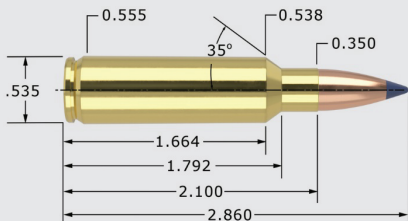

## 325 WSM - 180 grain

## 8mm (.323")

MAXIMUM SAAMI O.A.C.L.	2.860"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip <sup>®</sup>	<b>BT</b> 180gr. Spitzer	2.840"	0.394	0.246
Expansion Tip <sup>®</sup>	<b>ET</b> 180gr. Spitzer	2.800"	0.427	0.246

Due to internal construction differences, always begin with starting loads when using Expansion Tip<sup>®</sup> products.

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	71.7 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H414</b>	66.0 MAX. 3058	[Bar]	96%
	64.0 * 2975	[Bar]	93%
	62.0 2892	[Bar]	90%
<b>IMR 4350</b>	67.0 MAX. 3058	[Bar]	100%
	65.0 * 2980	[Bar]	97%
	63.0 2902	[Bar]	94%
<b>W760</b> Most Accurate Powder Tested	66.0 MAX. 3063	[Bar]	96%
	64.0 2975	[Bar]	93%
	62.0 * 2887	[Bar]	91%
<b>H4350</b>	66.0 MAX. 3064	[Bar]	97%
	64.0 * 2974	[Bar]	94%
	62.0 2885	[Bar]	92%
<b>IMR 4831</b>	69.0 MAX. 3082	[Bar]	** 103%
	67.0 * 3014	[Bar]	100%
	65.0 2946	[Bar]	97%
<b>N550</b>	64.0 MAX. 3085	[Bar]	99%
	62.0 2993	[Bar]	96%
	60.0 * 2902	[Bar]	93%
<b>Big Game</b>	66.0 MAX. 3091	[Bar]	94%
	64.0 3020	[Bar]	91%
	62.0 * 2950	[Bar]	88%
<b>Hunter</b>	70.5 * MAX. 3127	[Bar]	** 101%
	68.5 3057	[Bar]	98%
	66.5 2988	[Bar]	96%
<b>RL19</b>	73.0 * MAX. 3153	[Bar]	** 111%
	71.0 3093	[Bar]	** 108%
	69.0 3032	[Bar]	** 105%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load