


# Cartridge

## 33 Nosler - 180 grain

Version 9.0

# NOSLER®

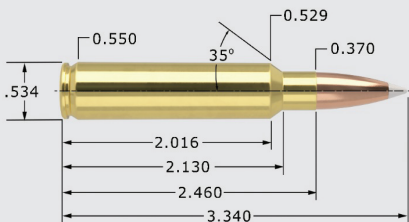

## 33 Nosler - 180 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		<b>AB</b> 180gr. Spitzer	3.340"	0.372	0.225
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	88.3 Gr. WATER	BARREL Length/Make	26" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>N160</b>	81.0 * MAX.	3270	** 102%		
	79.0	3196	99%		
	77.0	3122	97%		
<b>W760</b>	77.0 MAX.	3278	91%		
	75.0 *	3206	89%		
	73.0	3134	87%		
<b>IMR 4451</b>	77.5 * MAX.	3279	93%		
	75.5	3191	91%		
	73.5	3103	89%		
<b>H4350</b>	79.0 MAX.	3337	95%		
	77.0 *	3258	92%		
	75.0	3179	90%		
<b>Norma 204</b>	82.5 * MAX.	3342	** 104%		
	80.5	3251	** 101%		
	78.5	3160	99%		
<b>IMR 7828 SSC</b>	84.0 MAX.	3348	98%		
	82.0 *	3262	96%		
	80.0	3176	93%		
<b>IMR 4350</b>	80.0 MAX.	3358	97%		
	78.0 *	3277	94%		
	76.0	3196	92%		
<b>RL17</b> Most Accurate Powder Tested	79.5 MAX.	3391	93%		
	77.5 *	3304	91%		
	75.5	3217	89%		
<b>IMR 4831</b>	82.0 * MAX.	3401	99%		
	80.0	3306	97%		
	78.0	3212	94%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load