


Cartridge

33 Nosler - 200 grain

Version 9.0

NOSLER®

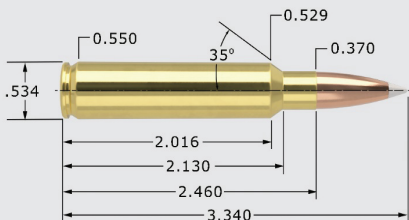

33 Nosler - 200 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.340"	0.414	0.250
CT® Ballistic Silvertip®	BST	200gr. Spitzer	3.340"	0.414	0.250
Expansion Tip®	ET	200gr. Spitzer	3.250"	0.425	0.250

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	84.3 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	80.5 * MAX. 3061		** 106%
	78.5 2962		** 103%
	76.5 2862		** 101%
AA 2700	77.5 * MAX. 3130		96%
	75.5 3057		93%
	73.5 2983		91%
H4831SC	85.0 MAX. 3131		** 105%
	83.0 * 3072		** 103%
	81.0 3012		100%
IMR 7828 SSC	82.5 MAX. 3143		** 101%
	80.5 * 3047		98%
	78.5 2950		96%
RL19 Most Accurate Powder Tested	85.0 * MAX. 3164		** 110%
	83.0 3081		** 107%
	81.0 2998		** 104%
AA 4350	82.0 MAX. 3185		** 109%
	80.0 * 3108		** 107%
	78.0 3031		** 104%
Norma 204	82.0 MAX. 3188		** 108%
	80.0 * 3098		** 105%
	78.0 3009		** 103%
RL17	77.0 * MAX. 3189		95%
	75.0 3084		92%
	73.0 2979		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load