


Cartridge

33 Nosler - 210 grain

Version 9.0

NOSLER®

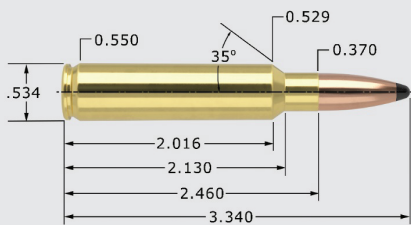

33 Nosler - 210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	210gr. Spitzer	3.300"	0.400	0.263
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	85.7 Gr. WATER	BARREL Length/Make	26" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2700	72.0 * MAX. 2947		88%		
	70.0 2883		85%		
	68.0 2818		83%		
IMR 7828 SSC	78.5 * MAX. 2969		94%		
	76.5 2891		92%		
	74.5 2813		90%		
N160	77.0 MAX. 2972		100%		
	75.0 * 2903		97%		
	73.0 2833		95%		
Norma 204	76.0 MAX. 2977		99%		
	74.0 * 2906		96%		
	72.0 2834		93%		
H4831SC	80.0 * MAX. 2980		97%		
	78.0 2914		95%		
	76.0 2848		92%		
AA 4350	76.5 * MAX. 2997		**	100%	
	74.5 2919			98%	
	72.5 2841			95%	
RL17	73.0 * MAX. 3009			88%	
	71.0 2926			86%	
	69.0 2844			83%	
RL19	81.5 MAX. 3075		**	103%	
	Most Accurate 79.5 2998		**	101%	
	Powder Tested 77.5 * 2922			98%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load