


# Cartridge

## 33 Nosler - 225 grain

Version 9.0

# NOSLER®

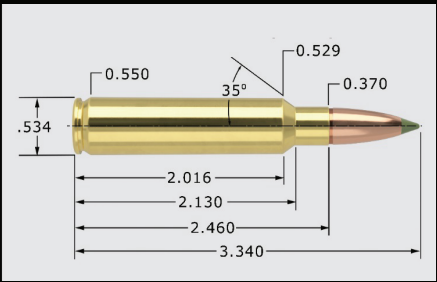

## 33 Nosler - 225 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 225gr. Spitzer	3.340"	0.550	0.281
Expansion Tip®	<b>ET</b> 225gr. Spitzer	3.290"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	<b>PT</b> 225gr. Spitzer	3.300"	0.454	0.281

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	82.0 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W760</b>	71.0 MAX.	2872	91%
	69.0 *	2804	88%
	67.0	2735	86%
<b>N160</b>	75.0 MAX.	2881	** 102%
	73.0 *	2823	99%
	71.0	2765	96%
<b>H4831SC</b>	80.0 MAX.	2900	** 102%
	78.0 *	2841	99%
	76.0	2782	97%
<b>IMR 7828 SSC</b>	78.5 * MAX.	2902	99%
	76.5	2808	96%
	74.5	2714	94%
<b>Norma MRP</b>	79.0 MAX.	2940	** 106%
	77.0	2859	** 103%
	75.0 *	2779	** 101%
<b>RL17</b>	73.0 MAX.	2941	92%
	71.0 *	2845	90%
	69.0	2749	87%
<b>RL19</b> Most Accurate Powder Tested	79.0 * MAX.	2963	** 105%
	77.0	2889	** 102%
	75.0	2815	99%
<b>RL22</b>	79.5 * MAX.	2973	** 105%
	77.5	2898	** 103%
	75.5	2822	100%
<b>RL23</b>	79.0 MAX.	2986	** 107%
	77.0 *	2919	** 104%
	75.0	2852	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load