


# Cartridge

## 33 Nosler - 250 grain

Version 9.0

# NOSLER®

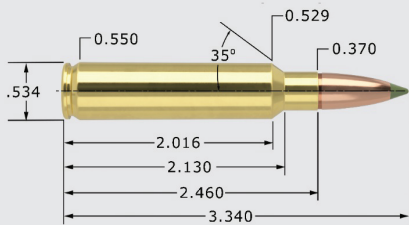

## 33 Nosler - 250 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b> 250gr. Spitzer	3.340"	0.575	0.313
Expansion Tip®	<b>ET</b> 250gr. Spitzer	3.250"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	<b>PT</b> 250gr. Spitzer	3.300"	0.473	0.313
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	81.4 Gr. WATER	BARREL Length/Make	26" H-S Prec.	
		BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>N160</b>	70.0 MAX.	2595	96%	
	68.0 *	2527	93%	
	66.0	2458	90%	
<b>Norma 204</b>	70.5 * MAX.	2637	96%	
	68.5	2567	94%	
	66.5	2497	91%	
<b>H4831SC</b>	76.0 MAX.	2677	97%	
	74.0 *	2616	95%	
	72.0	2555	92%	
<b>Norma MRP</b>	75.0 MAX.	2693	**	101%
	73.0 *	2603	99%	
	71.0	2513	96%	
<b>IMR 7828 SSC</b> Most Accurate Powder Tested	74.5 MAX.	2699	94%	
	72.5 *	2630	92%	
	70.5	2561	89%	
<b>RL22</b>	74.0 * MAX.	2703	99%	
	72.0	2627	96%	
	70.0	2552	93%	
<b>AA 4350</b>	71.0 * MAX.	2708	98%	
	69.0	2647	95%	
	67.0	2586	92%	
<b>RL19</b>	76.0 MAX.	2745	**	101%
	74.0 *	2661	99%	
	72.0	2577	96%	
<b>RL23</b>	76.5 MAX.	2784	**	104%
	74.5	2719	**	102%
	72.5 *	2654	99%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load