


Cartridge

33 Nosler - 265 grain

Version 9.0

NOSLER®

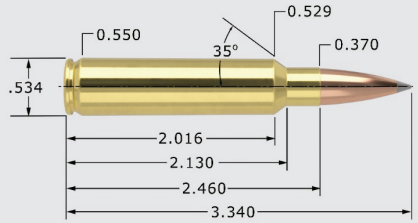

33 Nosler - 265 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond® Long Range		ABLR 265gr. Spitzer	3.340"	0.732	0.331	
CASE TYPE:	Nosler	PRIMER TYPE	WLRM			
CASE HOLDS:	78.3 Gr. WATER	BARREL Length/Make	26" H-S Prec.			
		BARREL Twist	1-10"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
IMR 7977	80.0 * MAX.	2703		**	110%	
	78.0	2664		**	107%	
	76.0	2626		**	104%	
Norma 204	73.5 MAX.	2764		**	104%	
	71.5 *	2691		**	101%	
	69.5	2619			99%	
AA 4350	75.5 MAX.	2787		**	108%	
	73.5 *	2716		**	105%	
	71.5	2646		**	103%	
H4831SC	78.0 MAX.	2788		**	104%	
	76.0 *	2730		**	101%	
	74.0	2673			98%	
RL23	75.5 MAX.	2810		**	107%	
	73.5 *	2746		**	104%	
	71.5	2682		**	101%	
IMR 7828 SSC	76.0 MAX.	2812			100%	
	74.0 *	2736			97%	
	72.0	2659			95%	
Norma MRP	78.5 MAX.	2826		**	110%	
	76.5 *	2755		**	107%	
	74.5	2685		**	105%	
RL22	79.0 MAX.	2848		**	110%	
	Most Accurate	77.0 *	2782		**	107%
	Powder Tested	75.0	2716		**	104%
RL19	79.5 * MAX.	2850		**	110%	
		77.5	2795		**	108%
		75.5	2739		**	105%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load