


Cartridge

33 Nosler - 300 grain

Version 9.0

NOSLER®

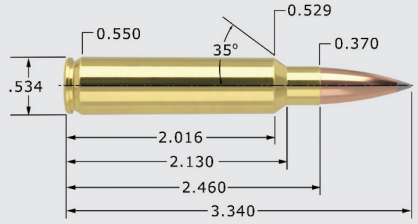

33 Nosler - 300 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	300gr. Spitzer	3.340"	0.720	0.375
AccuBond® Long Range	ABLR	300gr. Spitzer	3.370"	0.785	0.375
Custom Competition®	CC	300gr. HPBT	3.340"	0.800	0.375
Reduced Drag Factor™	RDF	300gr. HPBT	3.370"	0.826	0.375

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	76.8 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	68.5 * MAX. 2433		99%
	66.5 2359		96%
	64.5 2285		93%
IMR 7977	75.0 MAX. 2504		** 105%
	73.0 * 2436		** 102%
	71.0 2369		99%
IMR 7828 SSC	72.5 MAX. 2528		97%
	70.5 * 2458		95%
	68.5 2388		92%
H4831SC	73.5 * MAX. 2529		100%
	71.5 2478		97%
	69.5 2427		94%
H1000	75.0 * MAX. 2533		** 103%
	73.0 2482		** 101%
	71.0 2430		98%
Norma MRP	73.0 MAX. 2537		** 104%
	71.0 * 2467		** 102%
	69.0 2397		99%
RL22	73.5 * MAX. 2547		** 104%
	71.5 2482		** 101%
	69.5 2418		98%
RL25 Most Accurate Powder Tested	76.0 MAX. 2557		** 108%
	74.0 2496		** 105%
	72.0 * 2435		** 102%
RL23	72.0 MAX. 2566		** 104%
	70.0 2506		** 101%
	68.0 2446		98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load