


CARTRIDGE

330 Dakota - 180 grain

Version 8.0

Nosler[®]

UP FRONT

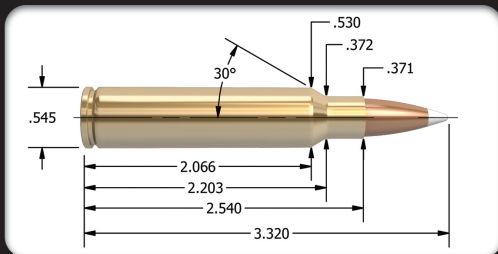

330 Dakota - 180 grain

338 Cal. (.338")

MAXIMUM O.A.C.L. 3.320"

B.C. S.D.

AccuBond [®]	180gr. Spitzer	0.372	0.225
CASE TYPE:	Dakota	PRIMER TYPE	Fed 215
CASE HOLDS:	84.8 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL19	85.5 MAX.	3168	** 110%
	83.5	3110	** 107%
	81.5 *	3026	** 104%
Varget	73.5 * MAX.	3181	94%
	71.5	3072	91%
	69.5	2992	89%
H4831SC Most Accurate Powder Tested	86.0 MAX.	3192	** 106%
	84.0 *	3131	** 103%
	82.0	3037	** 101%
IMR 4350	81.5 MAX.	3205	** 102%
	79.5 *	3165	99%
	77.5	3030	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load