


CARTRIDGE

330 Dakota - 250 grain

Version 8.0

Nosler®

UP FRONT

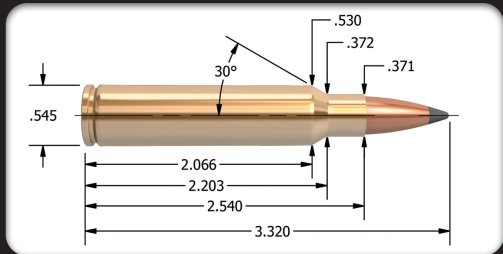

330 Dakota - 250 grain

338 Cal. (.338")

MAXIMUM O.A.C.L. 3.320"

B.C. S.D.

AccuBond®	250gr. Spitzer		0.575	0.313
Partition®	250gr. Spitzer		0.473	0.313
CASE TYPE:	Dakota	PRIMER TYPE	Fed 215	
CASE HOLDS:	84.6 Gr. WATER	BARREL Length/Make	26" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350 Most Accurate Powder Tested	72.5 MAX.	2685	91%
	70.5	2625	88%
	68.5 *	2555	86%
Viht N160	75.0 * MAX.	2688	99%
	73.0	2644	96%
	71.0	2576	93%
RL19	78.5 * MAX.	2730	** 101%
	76.5	2682	98%
	74.5	2605	96%
H4831SC	78.0 MAX.	2736	96%
	76.0 *	2687	94%
	74.0	2619	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load