


Cartridge

338-06 A-Sq - 180 grain

Version 9.0

NOSLER®

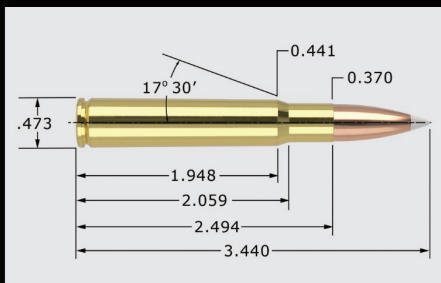

338-06 A-Sq - 180 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.440"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		AB 180gr. Spitzer	3.330"	0.372	0.225
CASE TYPE:	Nosler	PRIMER TYPE		WLR	
CASE HOLDS:	64.0 Gr. WATER	BARREL Length/Make		24" Lilja	
		BARREL Twist		1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
AA 2495	55.0 MAX. 2901		98%		
	53.0 * 2804		94%		
	51.0 2708		91%		
N150 Most Accurate Powder Tested	57.0 MAX. 2920		** 105%		
	55.0 * 2836		** 101%		
	53.0 2753		97%		
W748	57.0 MAX. 2931		93%		
	55.0 * 2853		90%		
	53.0 2776		86%		
RL15	57.0 MAX. 2963		93%		
	55.0 2882		90%		
	53.0 * 2802		86%		
H4895	56.0 MAX. 2966		96%		
	54.0 * 2861		93%		
	52.0 2757		89%		
IMR 4064	58.0 MAX. 2974		100%		
	56.0 2875		97%		
	54.0 * 2776		93%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load