


Cartridge

338-06 A-Sq - 200/210 grain

Version 9.0

NOSLER®

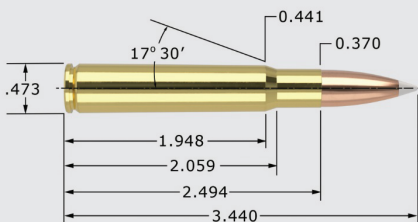

338-06 A-Sq - 200/210 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.440"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.330"	0.414	0.250
CT® Ballistic Silvertip®	BST	200gr. Spitzer	3.330"	0.414	0.250
Expansion Tip®	ET	200gr. Spitzer	3.330"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	210gr. Spitzer	3.330"	0.400	0.263

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	62.6 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	60.0 * MAX.	2610	** 103%
	58.0	2532	99%
	56.0	2455	96%
H380	58.5 MAX.	2630	98%
	56.5	2550	95%
	54.5 *	2470	92%
N150	54.0 MAX.	2642	** 101%
	52.0	2567	98%
	50.0 *	2492	94%
RL15	53.5 MAX.	2668	89%
	51.5	2563	86%
	49.5 *	2458	82%
IMR 4320	52.0 * MAX.	2690	90%
Most Accurate	50.0	2590	87%
Powder Tested	48.0	2490	83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load