


Cartridge

338-06 A-Sq - 225 grain

Version 9.0

NOSLER®

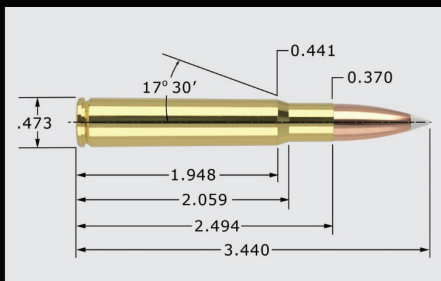

338-06 A-Sq - 225 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.440"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	225gr. Spitzer	3.330"	0.550	0.281
Expansion Tip®	ET	225gr. Spitzer	3.330"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	225gr. Spitzer	3.330"	0.454	0.281

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	61.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	49.5 MAX.	2484	88%
	Most Accurate	2403	85%
	Powder Tested	45.5 * 2321	81%
IMR 4064	50.5 * MAX.	2532	91%
		48.5 2439	88%
		46.5 2346	84%
RL15	50.5 * MAX.	2570	86%
		48.5 2473	83%
		46.5 2375	79%
IMR 4350	58.0 MAX.	2575	** 102%
		56.0 2486	98%
		54.0 * 2396	95%
H414	60.0 * MAX.	2595	** 102%
		58.0 2514	99%
		56.0 2434	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load