


# Cartridge

## 338-06 A-Sq - 250 grain

Version 9.0

# NOSLER®

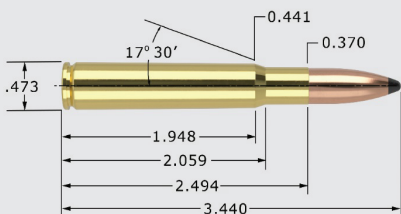

## 338-06 A-Sq - 250 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.440"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	250gr. Spitzer	3.330"	0.575	0.313
Expansion Tip®	<b>ET</b>	250gr. Spitzer	3.330"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	250gr. Spitzer	3.330"	0.473	0.313

CASE TYPE:	Nosler	PRIMER TYPE		WLR	
CASE HOLDS:	57.6 Gr. WATER	BARREL Length/Make		24" Lilja	
		BARREL Twist		1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4320</b>	48.5 * MAX. 2372		92%
	46.5 2257		88%
	44.5 2142		84%
<b>IMR 4350</b>	56.5 MAX. 2410		** 105%
	54.5 2320		** 101%
	52.5 * 2230		97%
<b>N150</b>	50.5 * MAX. 2413		** 103%
	48.5 2341		99%
	46.5 2268		95%
<b>H380</b>	55.5 MAX. 2418		** 101%
	Most Accurate 53.5 2343		98%
	Powder Tested 51.5 * 2268		94%
<b>RL15</b>	50.0 * MAX. 2420		90%
	48.0 2320		87%
	46.0 2220		83%
<b>W760</b>	53.5 MAX. 2424		97%
	51.5 2345		94%
	49.5 * 2267		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load