


# Cartridge

## 338-378 Wby Mag - 200/210 grain

Version 9.0

# NOSLER®

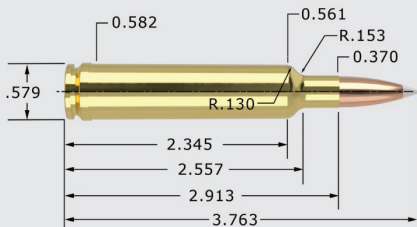

## 338-378 Wby Mag - 200/210 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.763"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	200gr. Spitzer	3.700"	0.414	0.250
CT® Ballistic Silvertip®	<b>BST</b>	200gr. Spitzer	3.700"	0.414	0.250
Expansion Tip®	<b>ET</b>	200gr. Spitzer	3.700"	0.425	0.250
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	210gr. Spitzer	3.700"	0.400	0.263

CASE TYPE:	Weatherby	PRIMER TYPE	WLRM
CASE HOLDS:	121.5 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H1000</b>	113.0 MAX. 3270		98%
Most Accurate Powder Tested	111.0 * 3212		97%
	109.0 3154		95%
<b>N165</b>	107.0 MAX. 3295		98%
	105.0 * 3229		96%
	103.0 3164		94%
<b>IMR 7828</b>	107.0 * MAX. 3369		94%
	105.0 3307		92%
	103.0 3245		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load