


# Cartridge

## 338-378 Wby Mag - 225 grain

Version 9.0

# NOSLER®

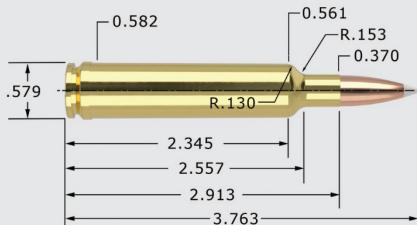

## 338-378 Wby Mag - 225 grain

## 338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.763"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	225gr. Spitzer	3.700"	0.550	0.281
Expansion Tip®	<b>ET</b>	225gr. Spitzer	3.700"	0.611	0.281
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	225gr. Spitzer	3.700"	0.454	0.281

CASE TYPE:	Weatherby	PRIMER TYPE	WLRM
CASE HOLDS:	121.4 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4831SC</b>	102.0 MAX. 3147		88%
	100.0 3089		86%
	98.0 * 3030		84%
<b>N165</b>	104.5 MAX. 3149		96%
	Most Accurate 102.5 * 3087		94%
	Powder Tested 100.5 3025		92%
<b>H1000</b>	111.0 MAX. 3174		97%
	109.0 * 3127		95%
	107.0 3081		93%
<b>IMR 7828</b>	104.0 MAX. 3219		91%
	102.0 * 3154		89%
	100.0 3090		88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load