


Cartridge

338-378 Wby Mag - 250 grain

Version 9.0

NOSLER®

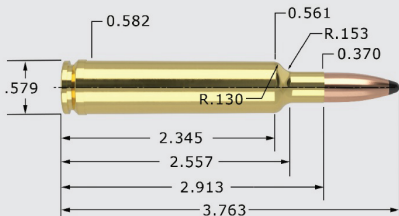

338-378 Wby Mag - 250 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.	3.763	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 250gr. Spitzer	3.700"	0.575	0.313
Expansion Tip®	ET 250gr. Spitzer	3.700"	0.627	0.313
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT 250gr. Spitzer	3.700"	0.473	0.313
CASE TYPE:	Weatherby	PRIMER TYPE	WLRM	
CASE HOLDS:	119.0 Gr. WATER	BARREL Length/Make	26" Wiseman	
		BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
N165	98.0 * MAX. 2902		92%	
Most Accurate	96.0 2837		90%	
Powder Tested	94.0 2772		88%	
H4831SC	99.0 * MAX. 2968		87%	
	97.0 2924		85%	
	95.0 2880		83%	
H1000	107.0 * MAX. 3001		95%	
	105.0 2947		93%	
	103.0 2894		92%	
IMR 7828	101.0 MAX. 3035		90%	
	99.0 2975		89%	
	97.0 * 2916		87%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load