


Cartridge

338-378 Wby Mag - 300 grain

Version 9.0

NOSLER®

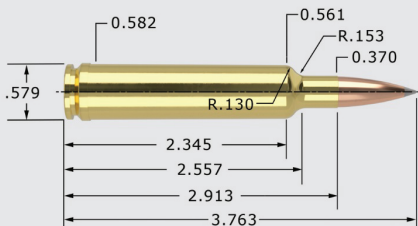

338-378 Wby Mag - 300 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		3.763"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	300gr. Spitzer	3.750"	0.720	0.375
AccuBond® Long Range	ABLR	300gr. Spitzer	3.750"	0.785	0.375
Custom Competition®	CC	300gr. HPBT	3.750"	0.800	0.375
Reduced Drag Factor™	RDF	300gr. HPBT	3.750"	0.826	0.375

CASE TYPE:	Norma	PRIMER TYPE	WLRM
CASE HOLDS:	113.1 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7828 SSC	93.0 MAX.	2663	85%
	91.0 *	2608	83%
	89.0	2554	81%
H1000	96.0 MAX.	2693	90%
	94.0 *	2640	88%
	92.0	2588	86%
H4831 Most Accurate Powder Tested	93.0 MAX.	2699	86%
	91.0	2647	84%
	89.0 *	2595	82%
Magnum	100.0 MAX.	2706	90%
	98.0	2663	88%
	96.0 *	2620	86%
RL25	97.0 MAX.	2713	93%
	95.0	2674	91%
	93.0 *	2636	89%
RL33	108.0 MAX.	2731	97%
	106.0 *	2673	96%
	104.0	2615	94%
Norma 217	102.0 * MAX.	2741	** 101%
	100.0	2691	99%
	98.0	2641	97%
Retumbo	102.0 MAX.	2777	97%
	100.0 *	2716	95%
	98.0	2656	93%
US869	115.0 MAX.	2831	** 104%
	113.0 *	2796	** 102%
	111.0	2762	** 101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load