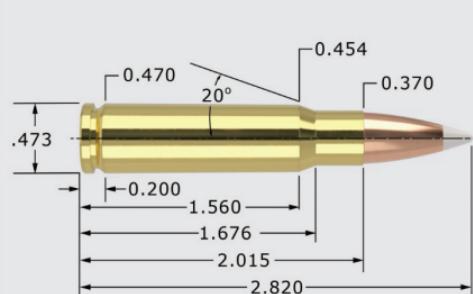


Cartridge

338 Fed - 180 grain

Version 9.0

NOSLER®

338 Fed - 180 grain

338 Cal. (.338")

MAXIMUM SAAMI O.A.C.L.		2.820"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	180gr. Spitzer	2.800"	0.372	0.225
CASE TYPE:	Federal	PRIMER TYPE	Fed 210		
CASE HOLDS:	45.2 Gr. WATER	BARREL Length/Make	24" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL15	48.0	MAX. 2655	** 111%		
	46.0 *	2574	** 106%		
	44.0	2493	** 101%		
IMR 4895	47.0	MAX. 2658	** 113%		
	45.0 *	2573	** 108%		
	43.0	2489	** 104%		
IMR 3031	43.5	MAX. 2676	** 107%		
	41.5 *	2594	** 102%		
	39.5	2512	** 97%		
W748	49.0	MAX. 2676	** 113%		
	47.0	2615	** 108%		
	45.0 *	2553	** 104%		
AA 2495 Most Accurate Powder Tested	45.0	MAX. 2679	** 113%		
	43.0 *	2601	** 108%		
	41.0	2523	** 103%		
N140	47.5	MAX. 2688	** 122%		
	45.5 *	2609	** 117%		
	43.5	2530	** 112%		
H335	46.0	MAX. 2691	** 103%		
	44.0	2597	99%		
	42.0 *	2503	94%		
Benchmark	45.0 *	MAX. 2707	** 108%		
	43.0	2601	** 103%		
	41.0	2495	98%		
Vtarget	48.0	MAX. 2707	** 115%		
	46.0 *	2602	** 110%		
	44.0	2496	** 105%		
TAC	47.0	MAX. 2734	** 106%		
	45.0	2633	** 101%		
	43.0 *	2532	97%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary.

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load